



Project:
Item Number:
Quantity:

MODULAR DROP-IN: TOP-MOUNT FABRICATOR WELL



Modular Drop-in: Top Mount Fabricator Well

DESCRIPTION

The modular drop-in is designed for top-mount installation and requires hard-wiring. The beveled edge is designed for easy cleaning.

High-density glass fiber insulation and internal design features allow zero-clearance installation and use of 1000W elements.

Deep stainless steel well allows use of full-size and fractional pans up to 6" (15.2 cm) deep while still providing moist heat. Adaptor bars are recommended when using fractional pans.

NOTICE: Drop-in is designed for use with moist heat; operation with water is required.

ITEMS

- 36368 120V (US/Canada)
- 36369 208-240V (US/Canada)

FEATURES

- Thermostatic control.
- Top is 20-gauge stainless steel, 18-8 Type 304, with approximately 1" (2.5 cm) overhang on all sides.
- Deep drawn well is 20-gauge 18-8 stainless steel.
- Standard 1000W heating element.
- Standard drain is ½" (1.27 cm) stainless steel fitting welded to pan with brass nipple extending below exterior housing. Drain screen included.
- Unit insulated on sides, ends, and below element assembly with high-density glass fiber insulation.
- Exterior housing is 20-gauge galvanized steel.
- Drop-in is supplied with stainless steel control panel for remote mounting of control.
- 4-ft. (121.9 cm) control cord contained in flexible metal conduit.
- Standard mounting tabs provided for sheet metal counters.

ACCESSORIES

- Optional mounting kit for laminate and solid surface countertops. Item No. 36370.

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to vollrathfoodservice.com.

Agency Listings




Due to continued product improvement, please consult vollrathfoodservice.com for current product specifications.


Approvals	Date

MODULAR DROP-IN: TOP-MOUNT FABRICATOR WELL


DIMENSIONS (shown in inches (cm)) Opening cutout must have a 7/8" (2.2 cm) corner radius.

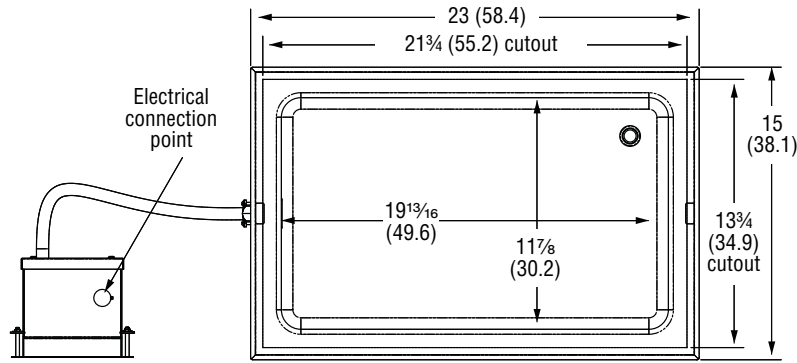


Top View

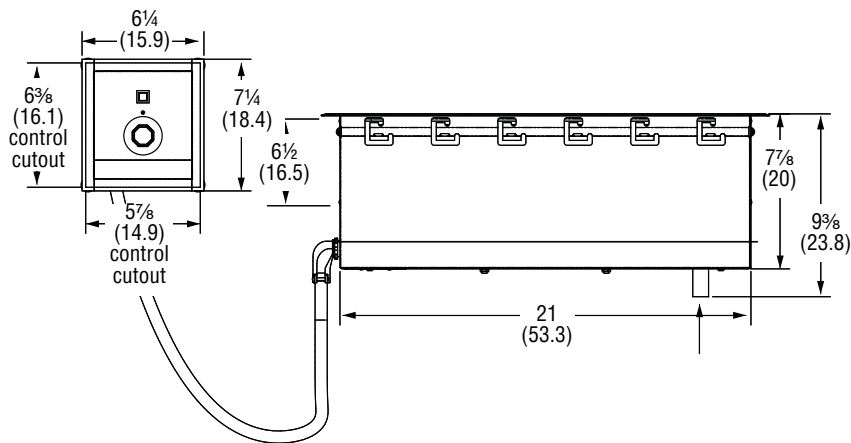

Front Views

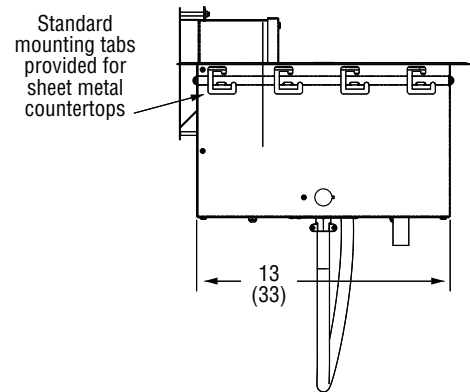

Side View

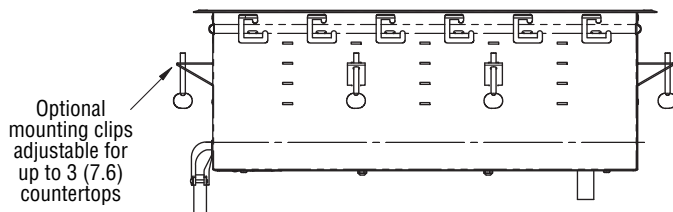

ELECTRICAL SPECIFICATIONS

Item No.	Watts	Volts	Amps
36368	1000	120	8.3
36369	750-1000	208-240	3.6-4.2

